

Lighting Specification Sheet

Classic MR-16 Well Light (CWLMR16)




Old world craftsmanship. . .tomorrow's technology®

Project: _____ Date: _____
Fixture Type: _____ Quantity: _____
Specifier: _____

Drawing not to scale

Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3.
Check voltage with digital multi-meter.

Extremely durable solid sand cast bronze ring and 5.25" molded convex pyrex glass lens.

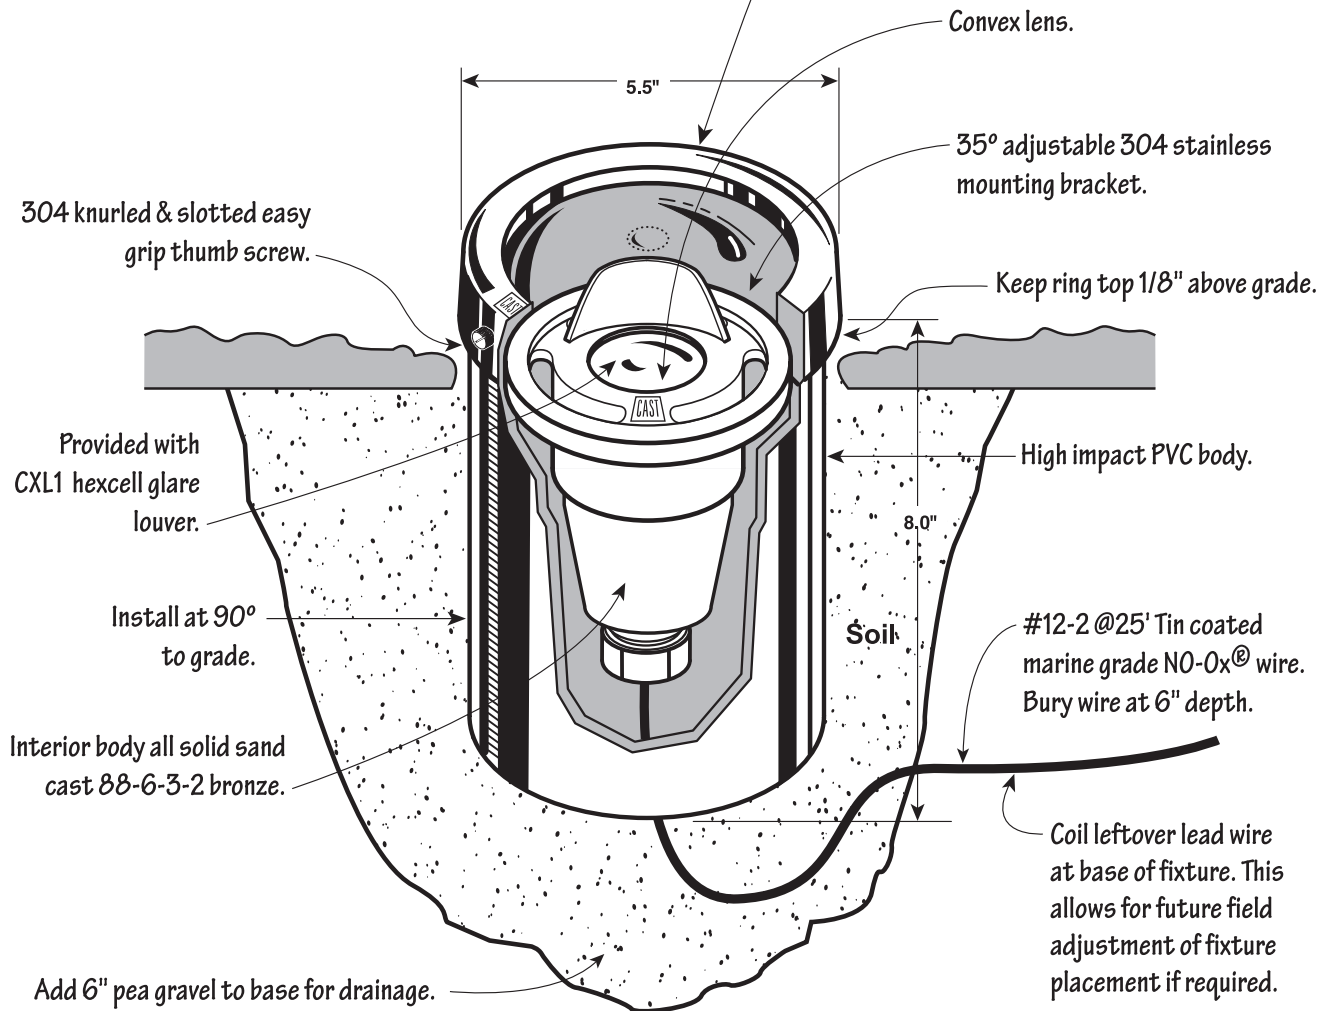

Plan Symbol:



Notes

- Requires MR-16 (not incl. max. rating 50W)
- Use only covered MR-16 lamps
- Do not install in low-lying areas where water can collect in

fixture

- Refer to product installation sheet prior to installation

OPTIONS

- ✗ Lens and Bronze Ring (CWLRI1CB)(incl.)
- ☐ Bronze Grate (CWLGI1CB)
- ☐ Lens for Bronze Grate (CWLGLENS)

- ☐ Optical Spread Lens (COSL)
- ☐ Optical Linear Spread Lens (COLL)
- ☐ Optical Frosted Lens (COFL)
- ✗ Hexcell Louver (CXL1)(incl.)