
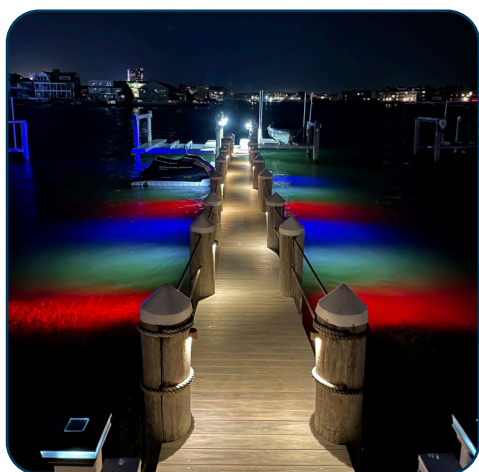


Bluetooth LED RGBW Adjustable Color Spotlight (SBLBTC1)

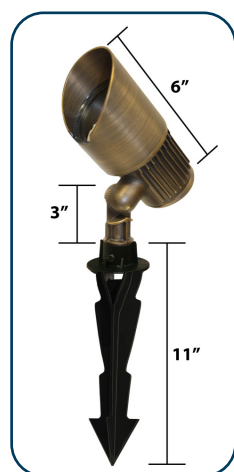

Description

Body: Brass body and knuckle with bronze finish

Shroud: Bayonet shroud adjustment with five settings

Wire: 6 foot, 105° rated, 18#-2 lead wire

Stake: Set-n-Stake® quick link composite with brass insert stake

Warranty: Ten year on integrated fixture

Certifications: Complies with requirement of UL-1838 and CAN/SCS-C22.2 No. 250.7. IP65 rated for harsh environments.

Features

Type: Integrated LED

Wattage: 2Watt-10Watt

Operating Voltage Range: 12-24V AC/DC power range

Lumen Output: 92lm to 342lm

Beam Spread: 36°

CRI: 76.8 to 83.2 CRI

CCT Options Available: Adjustable CCT range tunable from 2500K to 6500K

RGB Options: Unlimited color wheel options. Preset Red, Green, Blue, White

Dimming: Dimming option from 5% to 100% for every color choice

Reset: Simple to use reset button to bring the fixture back to original factory settings

Scenes: Fixture grouping, individual scene control, preset scenes, color cycling

Requirements: Unit requires the use of a Bluetooth Range Extender (SBLBTR)

BLUETOOTH RGBW SPOTLIGHT Electrical and Photometric Test Results

Fixture SBLBTC1	Color Setup in App	Flux	Beam Angle	Voltage	Current	Power	Pf	VA
*Testing done at full power	[-]	[Lumens]	[°]	[VAC]	[A]	[W]	[-]	
Source Lighting SBLBTC1 Spotlight	2700°	342	36°	12.0	1.7	10.300	0.732	14.1
Source Lighting SBLBTC1 Spotlight	Green	249	36°	12.0	1.2	10.700	0.730	14.7
Source Lighting SBLBTC1 Spotlight	Red	133	36°	12.0	1.1	9.260	0.720	12.9
Source Lighting SBLBTC1 Spotlight	Blue	47	36°	12.0	1.2	10.300	0.732	14.1
Source Lighting SBLBTC1 Spotlight	Indigo	92	36°	12.0	1.1	9.670	0.728	13.3