




## SRUL8

### 8W RECESSED UP LIGHT

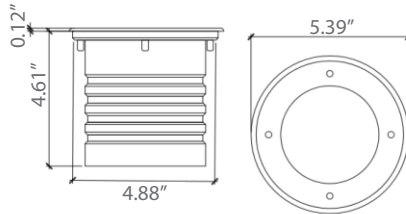

#### PRODUCT SPECIFICATIONS

Trim Material	Grade 316 Stainless Steel
Trim Finish	Stainless Steel
Glass	Clear Glass
Fixture Material	Die-cast Aluminum
Optic	Acrylic Optical Lens
Sleeve Material	Aluminum Alloy
Static Load Pressure	2500kg
Binning	3 Step MacAdam
Input Wiring	1 meter of 2 core 0.75mm <sup>2</sup> rubber cable
Life Span	50,000 hours

LED Chip	CREE COB
Power Consumption	8W
Input Voltage	12V AC, 50/60Hz or 12VDC. Also available 180 - 250VAC 50/60Hz (IP65)
Tilt Angle	15°
Operating Temperature	from - 4° to 149°F
Color Rendering Index	>85
Warranty	5 years against manufacturing defects
Agency Approval	CE, RoHS
Weight	1300g



Standard offering of fixture is 3000K and 35° Beam Spread. Other color temperatures (2700K, 4000K & 6000K) and beam spreads (60°) are available as a special order. Special orders require a minimum of 100 units and lead times for special orders are 8 weeks. Special orders require a 50% deposit on materials and any expedited freight charges will be the responsibility of the client.

Power (W)	Available color Temperatures	Luminous Flux			IP Rating	Available Beam Angles
		3000K	4000K	6000K		
8W	2700K 3000K 4000K 6000K	80lm/W	85lm/W	90lm/W	67	35° 60°