




Bluetooth LED RGBW Adjustable Color Wall Wash (SWLBTC1)

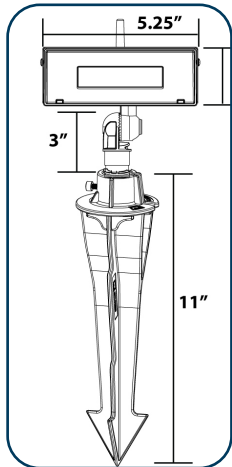

Description

Body: Brass body and knuckle with bronze finish

Shroud: Adjustable glare shield

Wire: 6 foot, 105° rated, 18#-2 lead wire

Stake: Set-n-Stake® quick link composite with brass insert stake

Warranty: Ten year on integrated fixture

Certifications: Complies with requirement of UL-1838 and CAN/SCS-C22.2 No. 250.7. IP65 rated for harsh environments.

Features

Type: Integrated LED

Wattage: 2Watt-10.4Watt

Operating Voltage Range: 12v-15v AC/DC power range

Lumen Output: 121lm to 528lm

Beam Spread: 20° to 80°

CRI: 76.8 to 83.2 CRI

CCT Options Available: Adjustable CCT range tunable from 2500K to 6000K

RGB Options: Unlimited color wheel options. Preset Red, Green, Blue, White

Dimming: Dimming option from 5% to 100% for every color choice

Scenes: Fixture grouping, individual scene control, preset scenes, color cycling

Requirements: Unit requires the use of a Bluetooth Range Extender (SBLBTR)

BLUETOOTH RGBW WALL WASH Electrical and Photometric Test Results

VOLTAGE RANGE 12V - 15V AC/DC

Actual Field Performance may vary by +/-5%

COLOR	VOLTAGE INPUT	CONSUMED WATTAGE	VA	LIGHT OUTPUT	DOMINANT WL
Red	12V AC/DC	10.37W	14.2	191.05lm	625nm
Green	12V AC/DC	10.31W	14.1	316.88lm	529.3nm
Blue	12V AC/DC	10.7W	14.7	121.43lm	458.4nm
White Color 2700K	12V AC/DC	10.04W	13.8	528.37lm	